
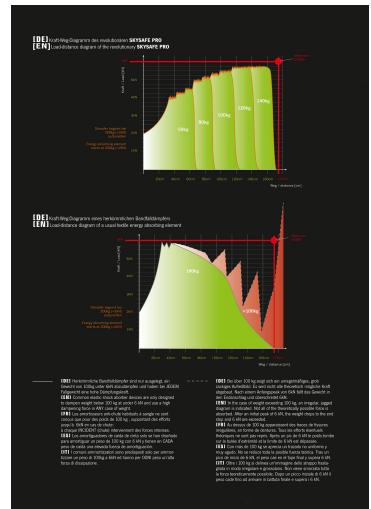


# DATASHEET

# SKYSAFE PRO FLEX Y

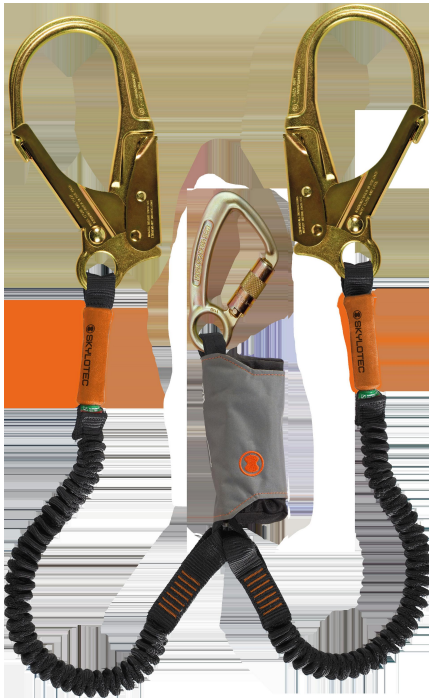

## GENERAL

|                        |               |
|------------------------|---------------|
| Art.Nr:                | L-0562-1,8    |
| GTIN:                  | 4030281180685 |
| E-class number:        | 40-21-08-10   |
| Customs tariff number: | 56090000      |

|               |                                                                                                                                  |
|---------------|----------------------------------------------------------------------------------------------------------------------------------|
| Standards:    | ANSI Z359.13-6/12FTFF:2013,EN 354:2010,EN 355:2002,EN 795:2012/B, MEETS CSA Z259.11-05-E6:2010,RFU PPE-R/11.063,RFU PPE-R/11.074 |
| Net weight:   | 2.89 kg                                                                                                                          |
| Gross weight: | 2.89 kg                                                                                                                          |

## DATASHEET

### SKYSAFE PRO FLEX Y

ONE4ALL - The SKYSAFE PRO Revolutionary, new, patented energy absorber with the large weight range from 50 - 140kg (110 - 310 lbs.) that always withstands a maximum impact of less than 6 kN at a maximum absorber length of 1.75m (5.7 Feet). The final impact resistance of 22 kN, also in the absorber, before AND after a fall is exceptional as well. SKYSAFE PRO furthermore meets the most relevant international standards in one SINGLE product. UNIQUE: The built-in, adjustable RESCUE LOOPS! As a result, rescuers need not set up a rescue system and hereby save precious time in a rescue! Available in four versions with different carabiner combinations: I-web, Y-web, I-web tie-back, Y-web tie-back.

#### FEATURES

|         |                     |
|---------|---------------------|
| Colour: | Orange, Black, Grey |
|---------|---------------------|

|                |     |
|----------------|-----|
| Fallindicator: | Yes |
|----------------|-----|

|               |         |
|---------------|---------|
| Impact force: | 6.00 kN |
|---------------|---------|

|            |       |
|------------|-------|
| Hand wash: | 40 °C |
|------------|-------|

|                |     |
|----------------|-----|
| Edge approved: | Yes |
|----------------|-----|

|                   |          |
|-------------------|----------|
| Maximum lifetime: | 10 years |
|-------------------|----------|

|                           |          |
|---------------------------|----------|
| Minimum tensile strength: | 22.00 kN |
|---------------------------|----------|

|                      |        |
|----------------------|--------|
| Minimum temperature: | -35 °C |
|----------------------|--------|

|                      |       |
|----------------------|-------|
| Maximum temperature: | 45 °C |
|----------------------|-------|

|              |     |
|--------------|-----|
| Rescue loop: | Yes |
|--------------|-----|

|               |           |
|---------------|-----------|
| Lanyard type: | Y-Version |
|---------------|-----------|

#### DIMENSIONS

|                 |        |
|-----------------|--------|
| length_lanyard: | 1.80 m |
|-----------------|--------|

|                        |          |
|------------------------|----------|
| Lanyard rope diameter: | 30.00 mm |
|------------------------|----------|

#### MATERIAL

|           |                             |
|-----------|-----------------------------|
| Material: | Polyester, Aluminium, Steel |
|-----------|-----------------------------|